


## LD184

### 6.5" 6W CEILING SPEAKER

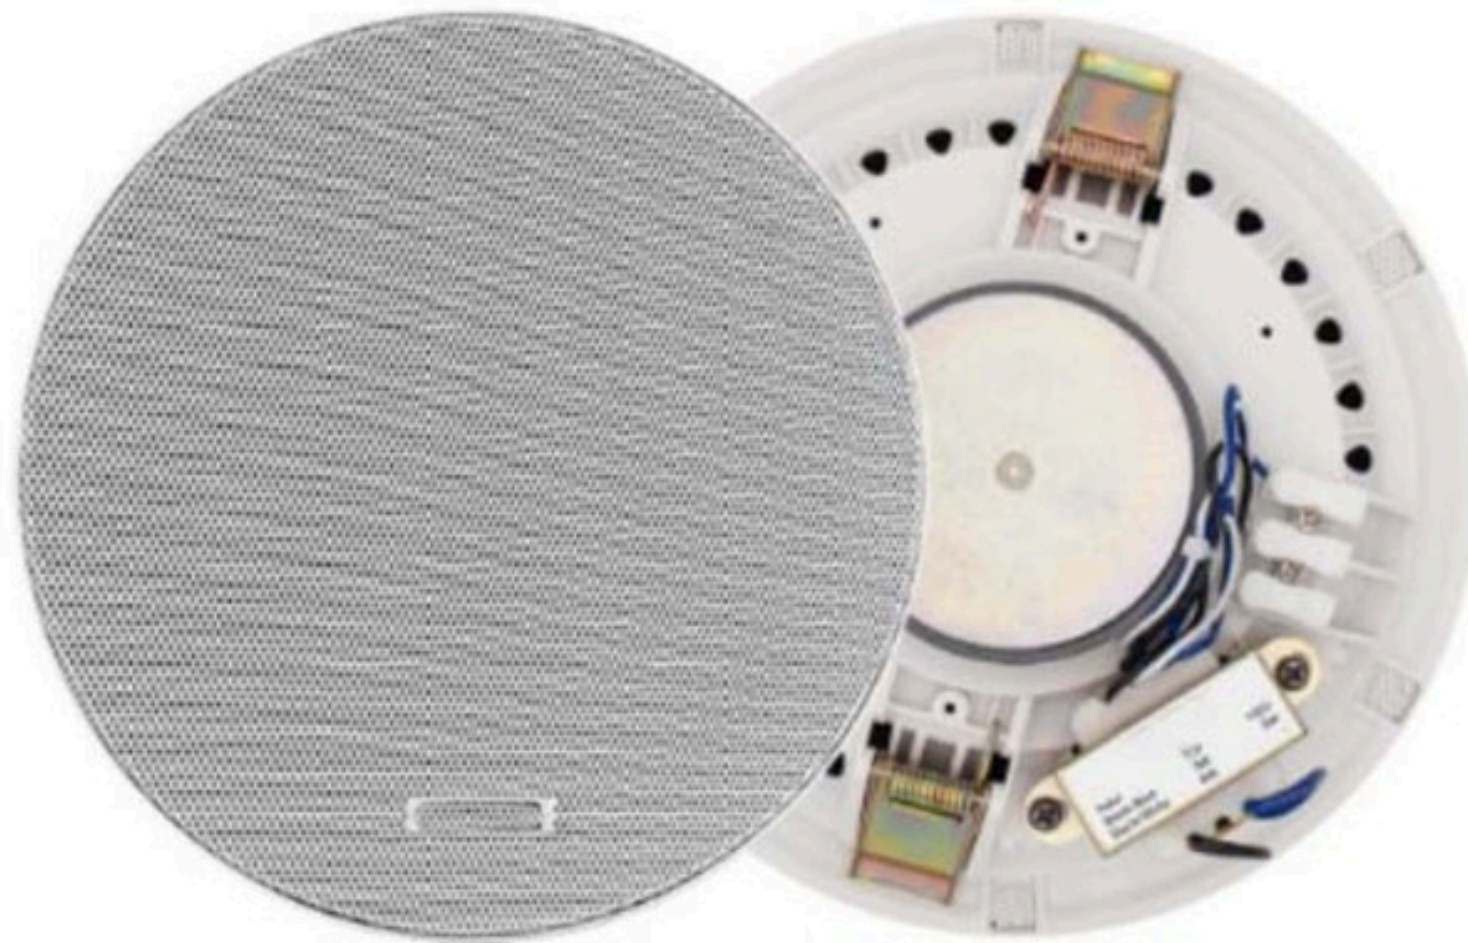

#### PRODUCT DESCRIPTION:

THE LD184 IS A SURFACE MOUNT CEILING SPEAKER WITH A 70V/100V TRANSFORMER BUILT IN. THE 70V/100V TRANSMISSION IS REALIZED IN A HIGH-VOLTAGE, LOW-CURRENT MODE, WHICH MAKES LONGER DISTANCE TRANSMISSION AND PARALLEL CONNECTION OF MULTIPLE LOUDSPEAKERS POSSIBLE. IT'S EASY TO INSTALL WITH STRONG CLIP, AND MADE OF HIGH-QUALITY ENGINEERING PLASTIC, WHICH IS DURABLE, NON-DEFORMABLE AND NON-FADING. IT IS AN IDEAL CHOICE FOR THESE PLACES, SUCH AS SCHOOLS, GYMNASIUMS, SQUARE HALLS, PARKS, PARKING LOTS, RAILWAY STATIONS, AIRPORTS, VILLA COMMUNITIES AND MALL SUPERMARKETS, ETC.

#### FEATURES:


- ALUMINUM GRILLE
- 6.5 INCH FRAMELESS
- 70/100V, RATED POWER:6W
- MAX. SPL:97±2DB
- SENSITIVITY 90±2DB
- FREQ. RESP.:110HZ - 15KHZ
- CUTOUT SIZE:Ø165-170MM
- THREE SPEAKER LINE TERMINAL, SUPPORT DIFFERENT POWER
- IN-CEILING QUICK INSTALLATION BY SPRING CLIP
- SUPPORT REMOTE CONTROL VIA THE IR REMOTE CONTROLLER.

### SPECIFICATIONS:


Model		LD184
RMS Power		6W
Rated Voltage	70V	3W/6W
	100V	6W
Driver Unit		6.5 inch
Max.SPL		97±2dB
Sensitivity		90±2dB
Freq. Response		110Hz - 15kHz
Installation		Ø165mm - Ø170mm
Dimension		190.5mm x70mm
Net Weight		0.6kg

### FREQUENCY RESPONSE:

(DB SPL、1W、1M)

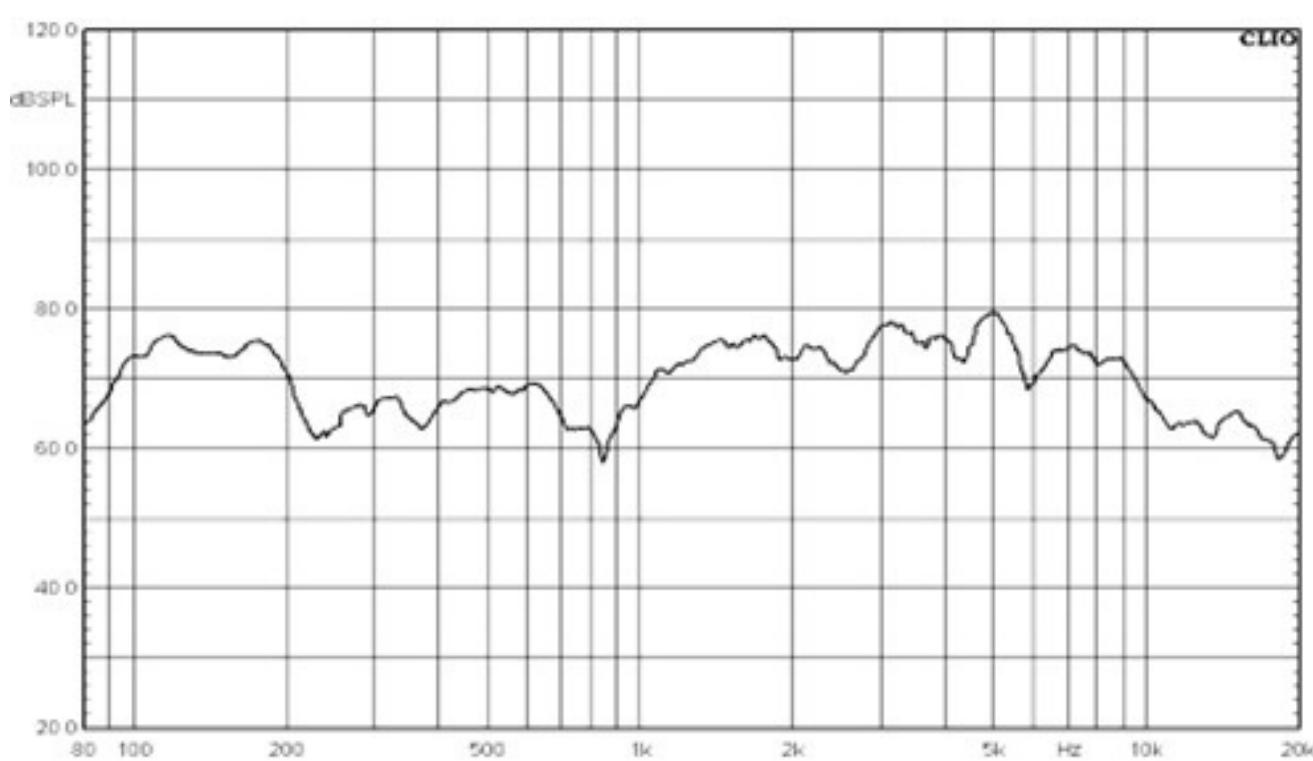

(THD < 1.5% 1W、1M、200HZ-10KHZ)

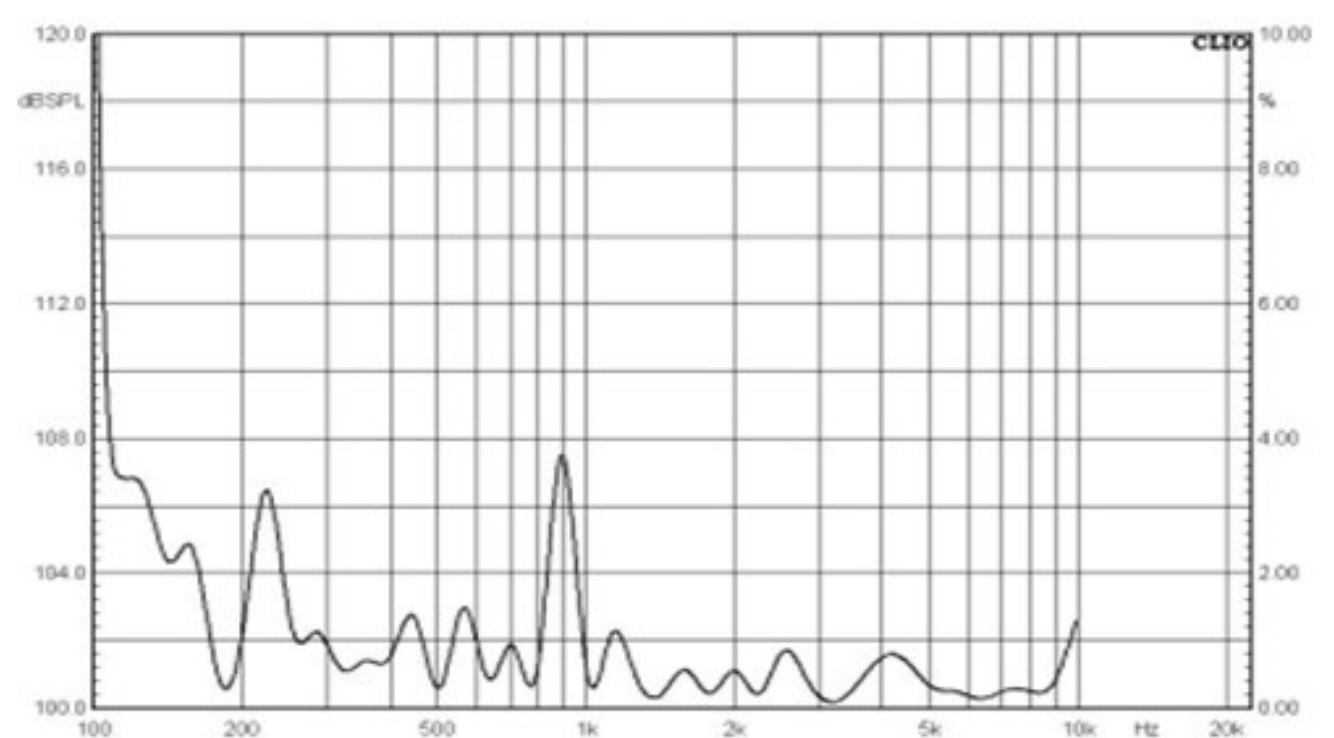

### DIMENSIONS:

